

FULL RANGE AMPLIFIER CLASS D


MAX POWER: 10000 WATTS
 FREQUENCY RESPONSE: 10Hz-20KHz
 Sensivity: 0.2-6V

GENERAL SPECIFICATIONS


Max Power:	10000 W
Signal to Noise Ratio:	> 85DB
Frequency Response:	20Hz-10KHz
Crossover High Pass (HPF):	10Hz-1KHz
Crossover Low Pass: (LPF):	50Hz-20KHz
Bass Boost:	0-18DB
Impedance of Entry:	18KOhms
Distortion (THD):	< 0,2%
Maximum Power Supply:	10,5VDC
Minimum Power Supply:	14,8VDC

RMS POWER


- (4 Ohms: 2200W RMS x1 CH)
- (2 Ohms: 3300W RMS x1 CH)
- (1 Ohm: 5000W RMS x1 CH)

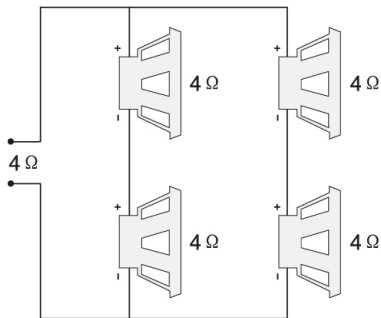

Series/parallel wiring

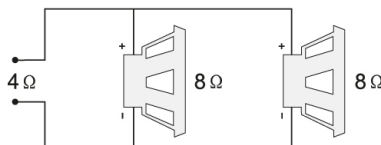

Parallel wiring

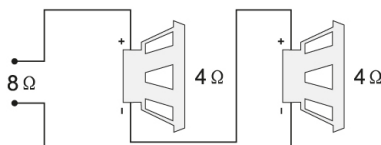

Series wiring

DIMENSIONS

440 mm x 233 mm x 69 mm

