

DA-L2655

EXTREME M6.5 NEW SERIE

GENERAL SPECIFICATIONS

Nominal Power Handling	260w
Transient Power 10ms	460w
Sensitivity	92.9dB
Frequency Response	121-7k Hz
Cone Material	PAPER
Net Weight	1.8kg

Electrical Data

Nominal Impedance	4 Ohm
DC Resistance	3.2 Ohm


Voice Coil And Magnet Parameters

Voice Coil Diameter	38.6mm
Voice Coil Height	8.4mm
HE Magnetic Gap Height	
Max. Linear Excursion	1.2mm
Voice Coil Bobbin	Kapton
Voice Coil Wire	Ccaw
Magnet System Type	Ferrite
BL Product	N.A 5.61

Thiele-Small Parameters

Fs	Hz	121
Mms	g	8.8
Cms	mm/N	0.19
Qms		6.89
Qes		0.68
Qts		0.62
Vas	L	4,86
Sd	cm ²	132.7
No	%	1,23

SPL vs FREQ

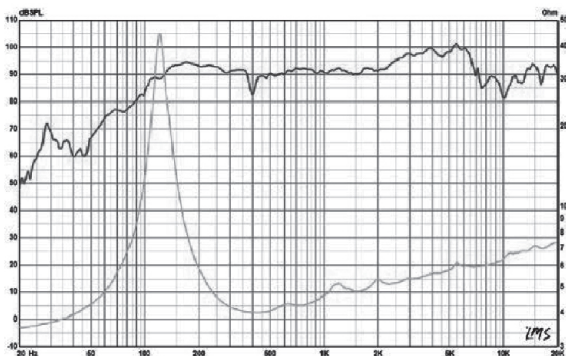

MIDRANGE SPEAKER 6.5"

MAX POWER:	460 WATTS
RMS POWER:	260 WATTS
FREQUENCY RESPONSE:	121-7K hz
SENSITIVITY:	92.9 dB
VOICE COIL:	38.6mm



MOUNTING INFO

Overall Diameter	170mm	Mounting Depth	66mm
Front Mount Baffle Cutout	149mm	Overall Depth	74mm

