

GENERAL SPECIFICATIONS

Nominal Power Handling	200w
Transient Power 10ms	400w
Sensitivity	99dB
Frequency Response	2K-19k Hz
Cone Material	Titanium
Net Weight	0.62kg

Electrical Data

Nominal Impedance	4 Ohm
DC Resistance	3.3 Ohm


Voice Coil And Magnet Parameters

Voice Coil Diameters	25.5mm
Voice Coil Height	2.3mm
HE Magnetic Gap Height	3mm
Voice Coil Bobbin	Kapton
Voice Coil Wire	Ccaw
Number of Layers	2
Magnet System Type	High Flux Ferrite
BL Product	

Thiele-Small Parameters

Resonant Frequency	Fs	2.0k Hz
--------------------	----	---------

SPL vs FREQ

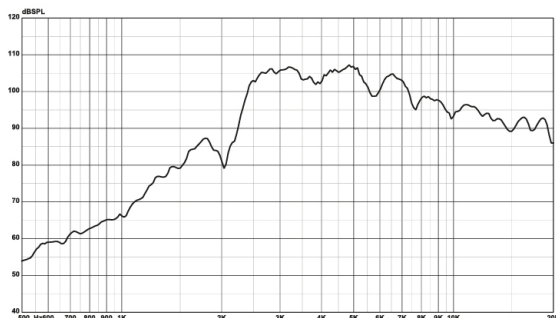

TITANIUM BULLET TWEETER 1"

MAX POWER:	400 WATTS
RMS POWER:	200 WATTS
FREQUENCY RESPONSE:	2k-19K hz
SENSITIVITY:	99 dB
VOICE COIL:	25.5mm



MOUNTING INFO

Overall Diameter	96mm	Mounting Depth	48mm
Front Mount Baffle Cutout	71mm	Overall Depth	55mm

