

GENERAL SPECIFICATIONS

Nominal Power Handling	100w
Transient Power 10ms	200w
Sensitivity	92dB
Frequency Response	144-13k Hz
Cone Material	PAPER
Net Weight	0.85kg

Electrical Data

Nominal Impedance	4 Ohm
DC Resistance	3.4 Ohm


Voice Coil And Magnet Parameters

Voice Coil Diameters	25mm
Voice Coil Height	7mm
HE Magnetic Gap Height	
Max. Linear Excursion	1.5mm
Voice Coil Bobbin	KSV
Voice Coil Wire	Ccaw
Number of Layers	0
Magnet System Type	11.4 Oz
BL Product	4.45 N.A

Thiele-Small Parameters

Suspension Compliance	Cms	119.2
Mechanical Q Factor		
Electrical Q Factor	Qes	2.1
Total Q Factor		1.69
Moving Mass	Mms	
Eq. Cas Air Load (liters)	VAS	3.95 liter
Resonant Frequency	Fs	144 Hz
Effective Piston Area		

SPL vs FREQ

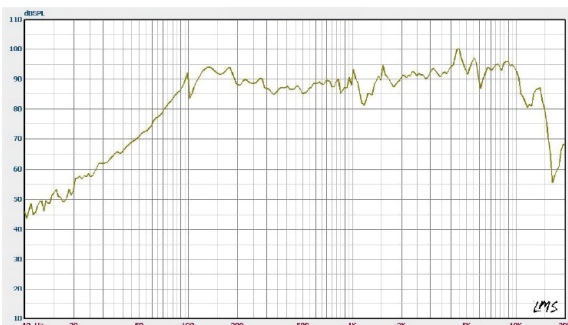

MIDRANGE SPEAKER 6.5"

MAX POWER:	200 WATTS
RMS POWER:	100 WATTS
FREQUENCY RESPONSE:	144-13K hz
SENSITIVITY:	92 dB
VOICE COIL:	25mm



MOUNTING INFO

Overall Diameter	165.69mm	Mounting Depth	69mm
Front Mount Baffle Cutout	147.69mm	Overall Depth	79mm

