

GENERAL SPECIFICATIONS

Nominal Power Handling	1500w
Transient Power 10ms	3000w
Sensitivity	87.6dB
Frequency Response	38-600k Hz
Cone Material	PAPER
Net Weight	17.2kg

Electrical Data

Nominal Impedance	4 Ohm
DC Resistance	3 Ohm


Voice Coil And Magnet Parameters

Voice Coil Diameters	76.5mm
Voice Coil Height	120mm
HE Magnetic Gap Height	16mm
Max. Linear Excursion	17.5mm
Voice Coil Bobbin	50mm
Voice Coil Wire	COPPER
Magnet System Type	Y30
BL Product	N.A 25.4

Thiele-Small Parameters

Fs	Hz	38
Mms	g	313
Cms	mm/N	53.5
Qms		7.07
Qes		0.71
Qts		0.64
Vas	L	44
Sd	cm ²	76
No	%	35

SPL vs FREQ

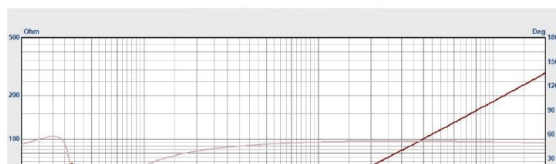

DUAL SUBWOOFER 15"

MAX POWER: 3000 WATTS
RMS POWER: 1500 WATTS
FREQUENCY RESPONSE: 38-600K hz
SENSITIVITY: 87.6 dB
VOICE COIL: 76.5mm



MOUNTING INFO

Overall Diameter	385mm	Mounting Depth	275mm
Front Mount Baffle Cutout	362mm	Overall Depth	240mm

