

DA-L165CMP

EXTREME CM6.5

GENERAL SPECIFICATIONS

Nominal Power Handling	60w
Transient Power 10ms	240w (pair)
Sensitivity	89dB
Frequency Response	65-20k Hz
Cone Material	W: PAPER / T: SILK
Net Weight	1.25kg

Electrical Data

Nominal Impedance	4 Ohm
DC Resistance Woofer	3.2 Ohm
DC Resistance Tweeter	3.6 Ohm


Voice Coil And Magnet Parameters

Voice Coil Diameters	W: 25.9mm / T: 25,4mm
Voice Coil Height	W: 10.9mm / T: 1.6mm
HE Magnetic Gap Height	W: 5mm / T: 2mm
Max. Linear Excursion	2.95mm
Coil Wire	W: Copper / T: Ccaw
Magnet System Type	W: Ferrite
Magnet System Type	T: Neodymium
BL Product	N.A 4.45

Thiele-Small Parameters

Fs	Hz	66	2K
Mms	g	11.6	
Cms	mm/N	0.48	
Qms		6.69	
Qes		0.78	
Qts		0.7	
Vas	L	13,3	
Sd	m ²	138.9	
No	%	0,48	

SPL vs FREQ

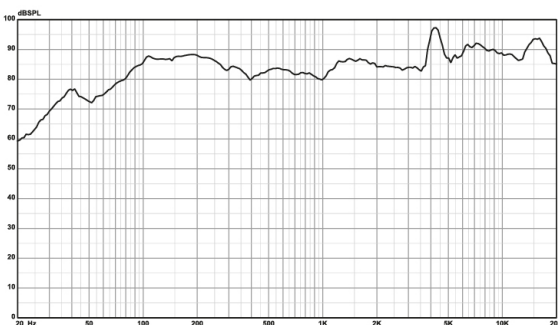


MIDRANGE SPEAKER 6.5"

MAX POWER:	240 WATTS (pair)
RMS POWER:	60 WATTS
FREQUENCY RESPONSE:	65-20K hz
SENSITIVITY:	89 dB
VOICE COIL WOOFER:	25.9mm
VOICE COIL TWEETER:	25.4mm



MOUNTING INFO

Overall Diameter Woofer:	166mm	Mounting Depth	65mm
Front Mount Baffle Cutout Woofer:	147mm	Overall Depth	72mm
Overall Diameter Tweeter:	52mm	Mounting Depth	28mm
Front Mount Baffle Cutout Tweeter:	48mm	Overall Depth	31mm

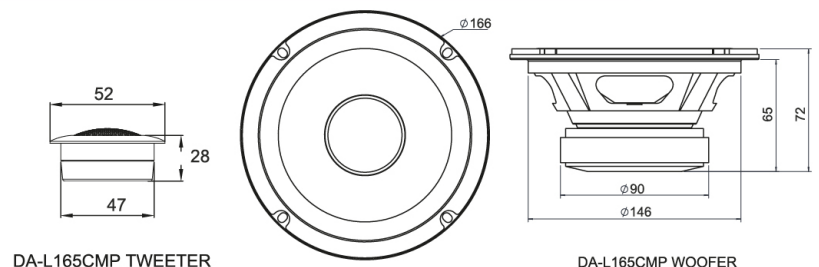

DA-L165CMP TWEETER

DA-L165CMP WOOFER