

### GENERAL SPECIFICATIONS

Nominal Power Handling	150w
Transient Power 10ms	320w
Sensitivity	92.1dB
Frequency Response	114-18k Hz
Cone Material	PAPER
Net Weight	1.85kg

### Electrical Data

Nominal Impedance	4 Ohm
DC Resistance	3.2 Ohm


### Voice Coil And Magnet Parameters

Voice Coil Diameters	38.6mm
Voice Coil Height	8.4mm
HE Magnetic Gap Height	6mm
Max. Linear Excursion	1.2mm
Voice Coil Bobbin	Kapton
Voice Coil Wire	Ccaw
Magnet System Type	Ferrite
BL Product	N.A 5.87

### Thiele-Small Parameters

Fs	Hz	141
Mms	g	10.12
Cms	mm/N	0.19
Qms		7.98
Qes		0.67
Qts		0.62
Vas	L	4,75
Sd	cm <sup>2</sup>	132.7
No	%	1,02

### SPL vs FREQ

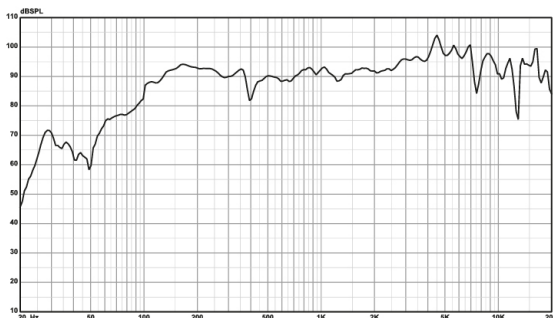

### MIDRANGE SPEAKER 6.5"

MAX POWER:	320 WATTS
RMS POWER:	150 WATTS
FREQUENCY RESPONSE:	114-18K hz
SENSITIVITY:	92.1 dB
VOICE COIL:	38.6mm



### MOUNTING INFO

Overall Diameter	166.6mm	Mounting Depth	66mm
Front Mount Baffle Cutout	146mm	Overall Depth	72mm

