

### GENERAL SPECIFICATIONS

Nominal Power Handling	300w
Transient Power 10ms	600w
Sensitivity	85.5dB
Frequency Response	43-300k Hz
Cone Material	FIBERGLASS
Net Weight	4.6kg

### Electrical Data

Nominal Impedance	4 Ohm
DC Resistance	3.2 Ohm


### Voice Coil And Magnet Parameters

Voice Coil Diameters	50.8mm
Voice Coil Height	25.6mm
HE Magnetic Gap Height	8mm
Max. Linear Excursion	8.8mm
Voice Coil Bobbin	0.15mm
Voice Coil Wire	COPPER
Magnet System Type	FERRITE
BL Product	N.A 9.57

### Thiele-Small Parameters

Fs	Hz	43
Mms	g	199.8
Cms	mm/N	0.06
Qms		4.89
Qes		0.95
Qts		0.8
Vas	L	26.6
Sd	cm <sup>2</sup>	530.9
No	%	0.22

### SPL vs FREQ

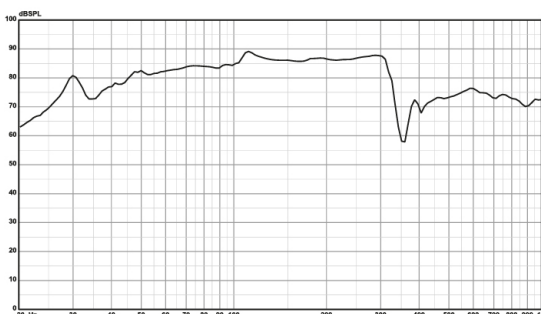

### SLIM SUBWOOFER 12"

MAX POWER:	600 WATTS
RMS POWER:	300 WATTS
FREQUENCY RESPONSE:	43-300K Hz
SENSITIVITY:	85.5 dB
VOICE COIL:	50.8mm



### MOUNTING INFO

Overall Diameter	318mm	Mounting Depth	118mm
Front Mount Baffle Cutout	284mm	Overall Depth	103mm

