

# DA-L1ENCLS12A+

## EXTREME ENCLOSURE S12A+

### GENERAL SPECIFICATIONS

Nominal Power Handling	350w
Transient Power	700w
Type	12" Active Enclosure
Frequency Response(-3dB)	50Hz-250Hz
Sensitivity (1W1M)	87.5dB
Max SPL	112dB
Impedance:	2Ω
LF Transducer	12"
Magnet	Ferrite
Voice Coil	2.0"
Amplifier Voltage	DC 12V
Controls	Phase LPF, Main Level
Input Interface	RCA, High Level Input

### 12" ACTIVE ENCLOSURE


MAX POWER: 700 WATTS  
 RMS POWER: 350 WATTS  
 FREQUENCY RESPONSE: 50Hz-250Hz  
 SENSITIVITY: 87.5 dB  
 VOICE COIL: 2.0"



### DIMENSIONS

600 X 380 X 303 X 178 mm  
 Net Weigh 14.4kg

### BUTTON PANEL

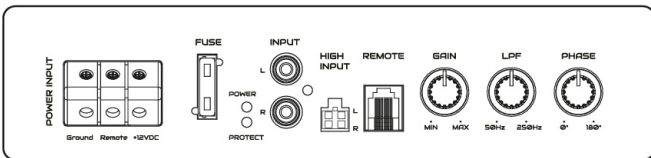

### SPL vs FREQ

