


GENERAL SPECIFICATIONS

- Material Composition: Aluminum + Butyl Rubber (46% Pure Butyl) + Adhesives
- Thickness: 2.2 mm (Test Standard)
- Total coverage area: 1.840 mm
- Noise Reduction (Stop Noise): 9.1 dB
- Tensile Strength: 27 KPA
- Water Absorption: 0.55%
- Temperature Stability: -20°C to +90°C
- Peel Strength (180°): 12.4 N/25mm (Butyl Layer Damage)
- Certifications: Non-Toxic, Odorless, No Corrosive (Meets Vehicle Emission Tests)

SONIC-SHIELD 46 DEADENING MAT

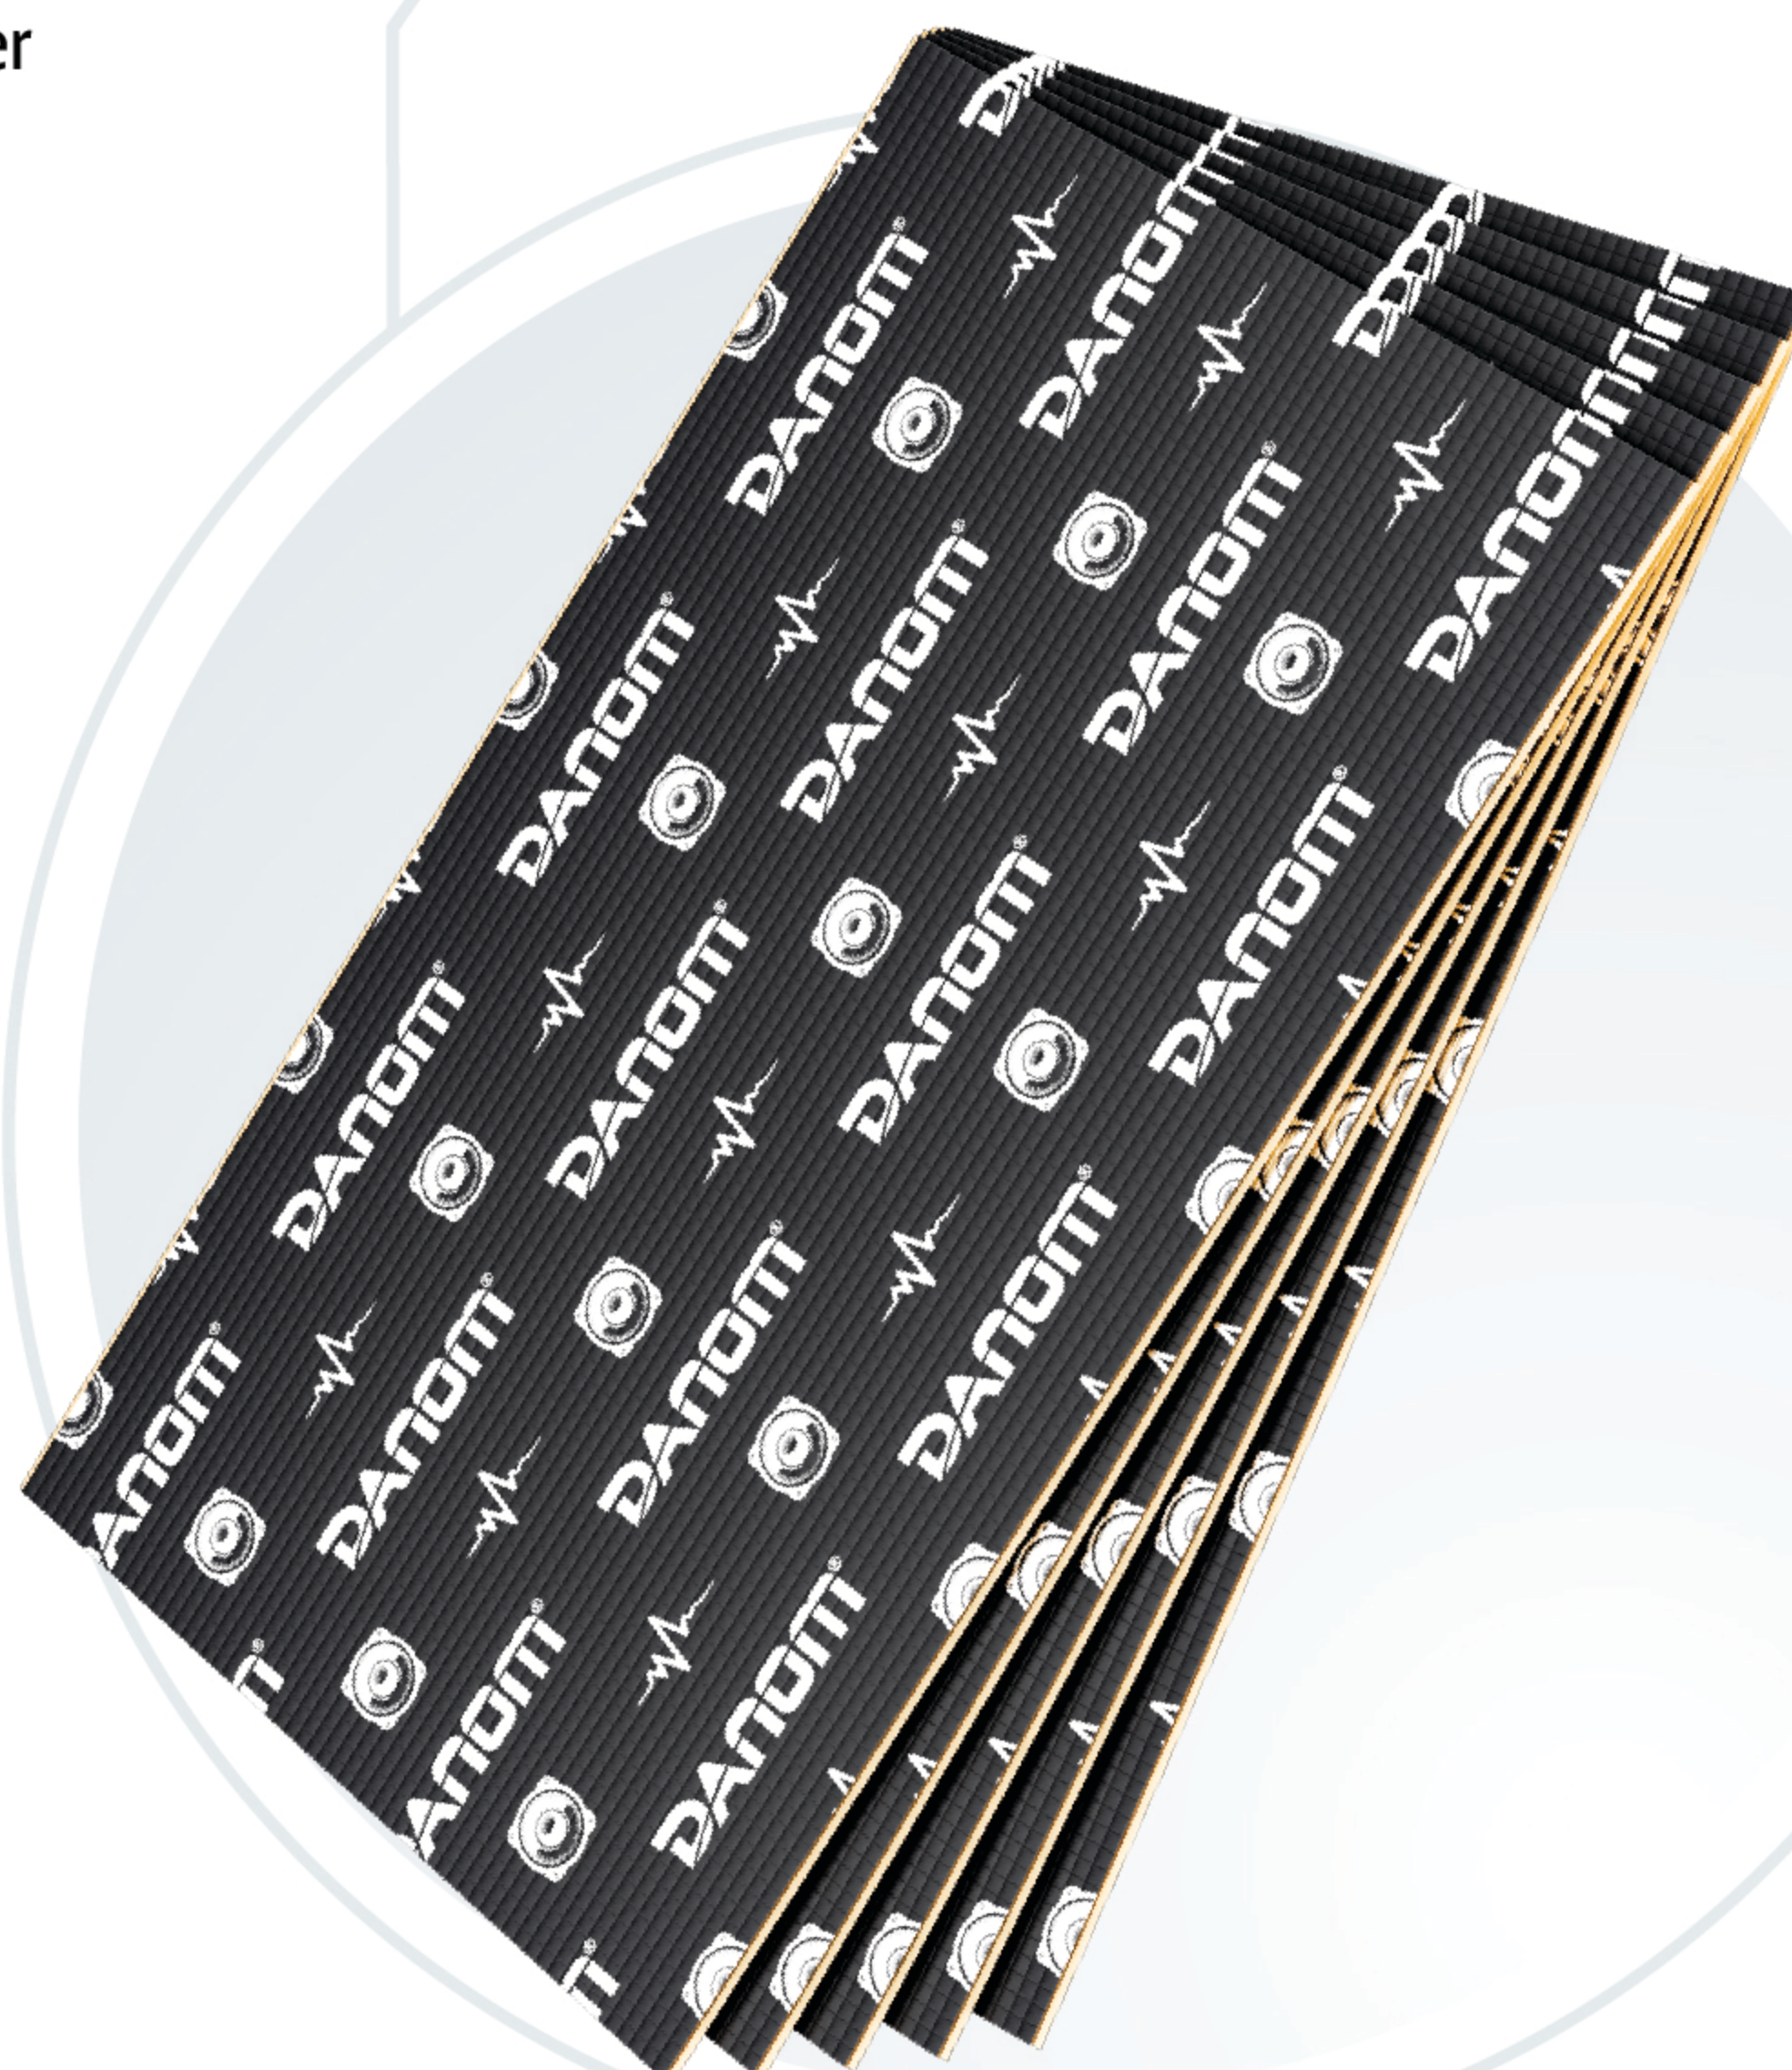

DIMENSIONS

800 x 460 x 2.2 mm x sheets 5
Total coverage area: 1840 mm²

