

DA-L1A1600.4AB

EXTREME A1.6K4AB

GENERAL SPECIFICATIONS

Max Power:	1600 W
Sensitivity:	0.2 V-6 V
Signal to Noise Ratio:	>90dB
Frequency Response:	20Hz-20kHz
Bass Boost:	0-6-12dB
Impedance of Entry:	26K Ohms
THD:	0.5%
Maximum Power Supply:	16V
Minimum Power Supply:	9V

RMS POWER

(4 Ohms: 60W RMS x 4 CH)
 (4 Ohms: 180W RMS x 2 CH)
 (2 Ohms: 90W RMS POWER x 4 CH)

DIMENSIONS


294 mm x 179 mm x 55.5 mm

4 CHANNEL CLASS AB AMPLIFIER

MAX POWER: 1600 WATTS
 FREQUENCY RESPONSE: 20Hz-20kHz
 SENSITIVITY: 0.2-6 V



POWER CONNECTION LEADS

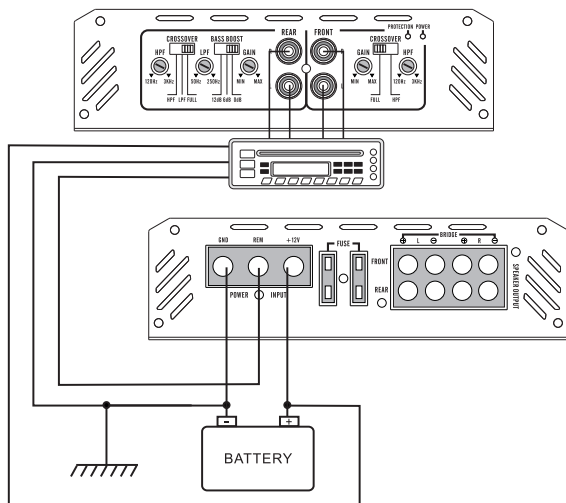

SERIES/PARALLEL WIRING

